

82" High-Definition LCD Display

Image preparation

Slide show, animated movies.... Possibilities are unlimited.



Image transfer

Various feeds are possible. Content can optionally be managed via WLAN, LAN GPRS, or even simply by USB plug.

Special features

Security glass and ambient light control. Elegantly-designed aluminium enclosure for both indoor and outdoor use.

Resolution	1920 x 1080 pixel Full HD
Pixel pitch	0,941mm
Brightness	700 nits (cd/m ²)
Contrast ratio	1.500:1
Viewing angle	89°/89°/89°/89° (U/D/L/R)
Temperature range (ambient)	- 40°C to +45°C
Brand customization	LED signs in the housing, custom design of the monopole, logo applications in various styles, choose any RAL-colour as a corporate match.
Controller	An integrated media player (Mini-PC) or a graphic card with controlling options and content memory can be installed.

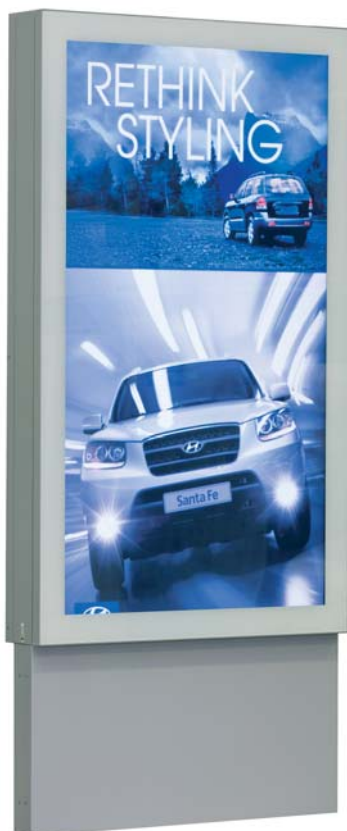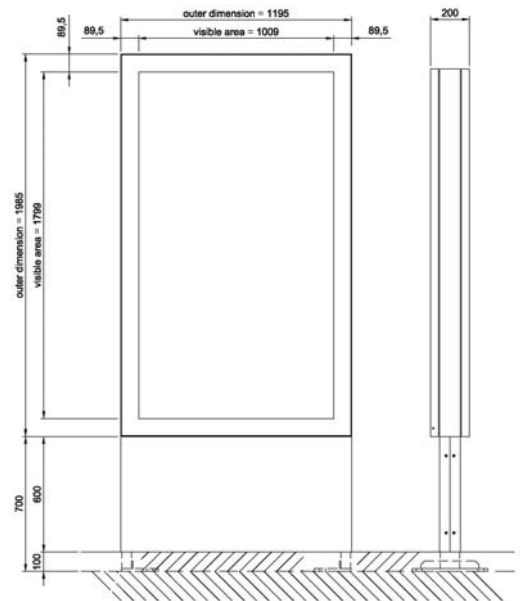

Outer dimensions	1195mm x 1985mm x 200mm
Active area	1016mm x 1806mm
Weight	approx. 200kgs, depending on design
Power consumption	approx. 1600 watts, depending on options

Options

Content-management network software and network-based infrastructure for operating multiple screens; TV-Coverage; Integrated speakers.

Maintenance

Extremely maintenance friendly. The unit is engineered to minimize the maintenance; i.e. implementing all functions through plug & play components, and easy access.

Life expectancy

The display has a minimum of 50.000hr life expectancy.

Specifications subject to change without prior notice.

This brochure is made of paper produced without chlorine bleaching. The wooden raw material derives from sustainable forestry. For further information, please contact our Sales and Marketing team via email at info@distec.com or call: